


ALTO

AVIATION

Premium Cabin Audio/Entertainment Solutions
for all aircraft in Business Aviation™

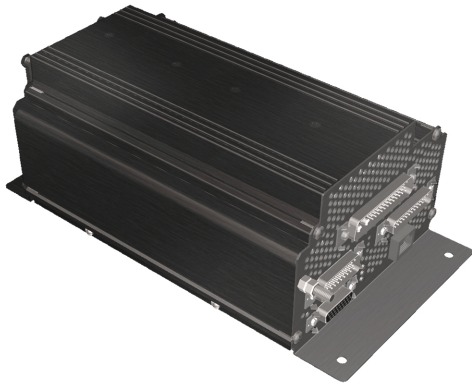

DA-240AC

**Aircraft Cabin Digital Audio
AC Amplifier with High-Level
Input Universal Interface**

The ALTO DA-240AC is a TSO-C139 certified 8 X 40W / channel, Class D audio amplifier with integrated Digital Signal Processing (DSP) and High-Level Input Interface board with PA bypass and Aux input. The core design includes an 8 channel, 320 Watt RMS audio amplifier with an advanced audio processor. An isolated Interface card integrated into the unit allows the unit to be powered by Cabin Management System power amplifier outputs. The interface card will accept full range or split midrange/subwoofer audio outputs. The DA-240AC interfaces with typical cockpit audio systems as an Entertainment Amplifier. A selectable auxiliary input may be used to interface with volume controlled, personal media devices independent of the existing IFE system.

FEATURES

- Unit certified to TSO-C139
- 8 channels, 40 Watts RMS per channel Class D for very high efficiency with low heat output
- Integral EQ customized for each aircraft interior
- Advanced DSP including dynamic bass management, signal compression, spatial enhancement, Sinewatch™ distortion elimination
- Allows PA over entertainment speakers via direct pass through, power loss or manual trigger.
- Integrated universal interface card that accepts directly coupled speaker level audio from full range or midrange/subwoofer outputs
- Volume controlled auxiliary input independent of legacy IFE system via ground logic select
- Preserves existing IFE configuration for ease of integration
- Supports 2 independent audio zones
- Operates on 115VAC power supply
- Weight under 4 Lbs.
- Small enclosure with forced air cooling for flexible mounting

SPECIFICATIONS

Product Code	106500-0240
Frequency Response	20Hz - 20KHz custom contoured to specific aircraft cabin
Power Supply	115VAC
Operating Current	1 A nominal 4 A maximum
Idle Current (no signal)	200 mA
Audio Input	2 Channel Speaker Level with separate hi-pass and low-pass inputs Line level stereo input for personal audio device
Output Power	40 Watts RMS/channel (320W) total
Output Load	4 - 8 Ohm recommended, 3 ohm minimum, Average impedance of all 8 channels must be >3.5 ohms
Distortion	<0.1% THD @ 50% rated power, maximum 3% (distortion limiter active)
Equalizers	Custom designed EQ/crossovers matched to aircraft cabin utilizing loudspeakers from the ALTO Aviation Entertainment System (AES) catalog
Dimensions	5.4"W x 3.7"H x 10.1"D (138mmW x 94mmH x 257mmD)
Weight	< 4.0 lbs / 1.81 kg
DO-160F Env. Cat.	[A2X]CAB[(SC)(HR)]EXXXFXZA(CF)[XXXI]AR(CF)ACTTM[XXE3X][XXXX]XAX

ALTO



AVIATION

Premium Cabin Audio/Entertainment Solutions
for all aircraft in Business Aviation™

DA-240AC

Aircraft Cabin Digital Audio
AC Amplifier with High-Level
Input Universal Interface


DIMENSIONS

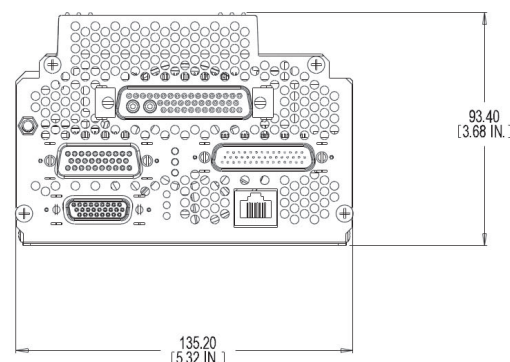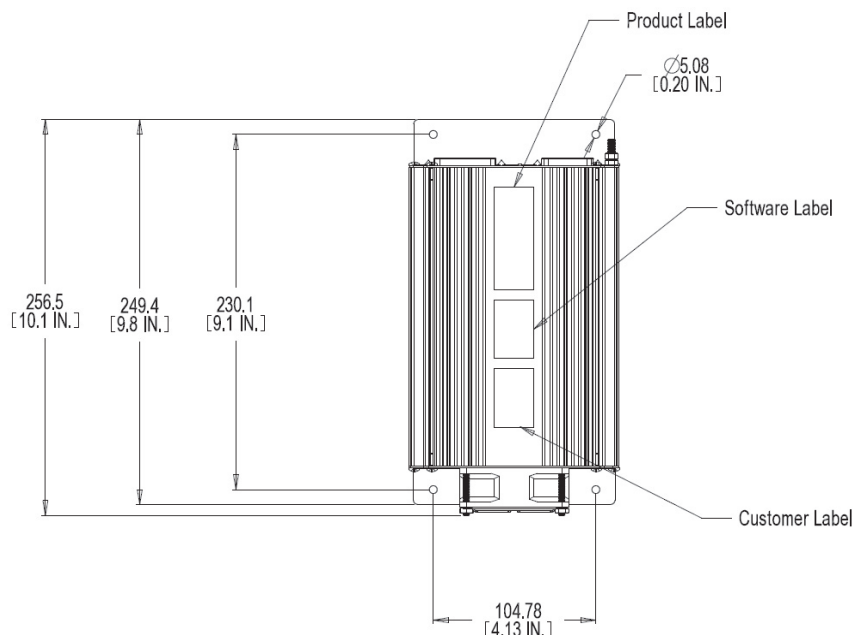

CONNECTOR PINOUTS

J1 MAIN Connector


43W2 Combo D Male
Mating connector



Positronic # CBD43W2M55B100V5X
Positronic # CBC43W2S110ANVL0/AA

J2 AUX Connector

26 pin D-sub Female
Mating connector



Positronic # ODD26F4B100V5X
Positronic # DD26M10ANVL0/AA

Interface Connector J4


25 pin Male Hi-Density
Mating connector



D-Sub Positronic # MD25M5B10T2X
Positronic # RD25S10JVLX

Interface Connector J5

29 pin Male Std-Density
Mating connector



D-Sub Positronic # MD29M5B100V5X
Positronic # RD29S10ANVL0/AA-1738.0

DA-240AC Digital Amplifier